

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	421.0 cd per klm. -26.5 degrees vertical 24.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	124.3V x 146.6H
	At 50% of Imax	83.1V x 128.9H
	At 90% of Imax	47.8V x 97.7H

Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	978.3 lumens per klm.
	To 50% of Imax	793.6 lumens per klm.
	To 90% of Imax	337.5 lumens per klm.

Upward LOR	0.0 %
Downward LOR	100.0 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:1
 Test Date:2023-12-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:6.790m [K=1.0000]
 Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:3366.3x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:一体透镜二代5头-6500K-18AH	DIM.: 720*250	SERIAL No.:
MFR.: EVERFINE	SUR.:455*170	Shielding Angle:

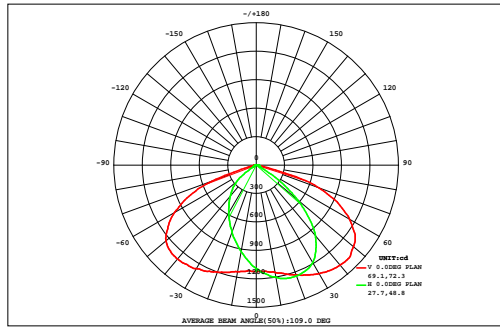

DATA OF LAMP		PHOTOMETRIC DATA	
MODEL	--	Imax(cd)	1417
NOMINAL POWER(W)	--	AVAILABILITY(%)	97.8
RATED VOLTAGE(V)	--	Avai. FLUX(lm)	3291
NOMINAL FLUX(lm)	3366.3	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	3366
TEST VOLTAGE(V)	--	θ @50%(H,V)	129,83DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm	Φ t	Φ a	
	0.01	0.03	0.05	0.05	0.06	0.07	0.08	0.08	0.07	0.07	0.07	0.06	0.05	0.05	0.11	0.14				0.13
90	0.01	0.03	0.05	0.05	0.06	0.07	0.08	0.08	0.07	0.07	0.07	0.06	0.05	0.05	0.11	0.14	0.13	0.06	1.22	0.00
80	0.01	0.05	0.10	0.21	0.38	0.55	0.68	0.69	0.56	0.49	0.50	0.45	0.34	0.22	0.16	0.14	0.11	0.05	5.69	0.00
70	0.02	0.07	0.35	1.41	1.99	2.34	2.82	2.55	1.58	1.27	1.70	1.68	1.28	1.04	0.64	0.22	0.11	0.05	21.1	2.38
60	0.02	0.15	1.64	4.76	5.81	6.37	7.03	6.66	5.32	4.93	5.52	5.27	4.21	3.86	2.88	0.70	0.13	0.05	65.3	56.5
50	0.02	0.37	4.15	8.32	10.7	11.2	12.4	12.8	11.7	11.3	11.5	10.5	8.88	8.37	6.28	2.26	0.21	0.05	131	130
40	0.02	0.89	6.55	11.9	15.4	16.3	16.9	17.6	16.5	16.0	16.2	14.8	14.1	13.1	9.71	4.47	0.38	0.05	191	190
30	0.03	1.60	8.57	15.2	19.7	21.7	21.9	22.3	21.5	20.9	20.7	19.7	19.5	17.6	13.0	6.55	0.68	0.05	251	251
20	0.03	2.23	10.3	18.2	23.8	26.7	27.4	27.0	26.6	25.9	25.6	25.6	24.6	21.8	16.0	8.27	1.05	0.05	311	310
10	0.03	2.65	11.7	20.8	27.6	31.4	32.6	32.3	31.6	31.0	31.4	31.2	29.5	25.6	18.7	9.61	1.33	0.05	369	369
0	0.03	2.65	11.8	21.5	29.3	33.9	35.8	35.9	35.3	35.6	35.8	34.9	32.5	27.5	19.4	9.76	1.33	0.05	403	403
-10	0.03	2.23	10.6	20.0	28.4	34.2	37.3	38.3	37.8	38.0	38.8	37.1	33.4	27.1	18.1	8.64	1.06	0.05	411	411
-20	0.03	1.61	8.96	17.7	26.5	33.7	38.1	38.9	38.1	38.2	39.3	38.5	33.3	25.4	15.9	6.97	0.69	0.05	402	401
-30	0.03	0.89	6.84	14.2	22.7	30.6	35.2	35.9	34.6	34.7	36.3	35.7	30.4	21.5	12.4	4.78	0.39	0.05	357	356
-40	0.03	0.38	4.26	9.85	16.4	23.2	27.1	27.8	25.7	25.8	27.9	27.0	22.6	14.9	7.96	2.38	0.23	0.05	264	262
-50	0.02	0.17	1.65	5.24	8.55	12.5	15.0	15.0	12.4	12.3	14.6	14.2	11.1	6.86	3.39	0.74	0.16	0.05	134	132
-60	0.02	0.11	0.40	1.45	2.36	3.60	4.73	4.40	2.66	2.42	3.72	3.75	2.62	1.46	0.72	0.29	0.14	0.05	34.9	17.6
-70	0.02	0.08	0.20	0.37	0.54	0.74	0.96	1.08	1.03	0.97	0.93	0.78	0.59	0.43	0.32	0.22	0.13	0.05	9.43	0.00
-80	0.01	0.05	0.11	0.20	0.29	0.36	0.40	0.43	0.44	0.43	0.39	0.34	0.28	0.22	0.21	0.19	0.14	0.06	4.55	0.00
-90	0.01	0.05	0.11	0.20	0.29	0.36	0.40	0.43	0.44	0.43	0.39	0.34	0.28	0.22	0.21	0.19	0.14	0.06	4.55	0.00
Φ t	0.42	16.2	88.2	171	241	289	316	320	303	300	311	301	269	217	146	66.3	8.40	0.93	3366	---
Φ a	0.00	13.2	85.5	168	237	285	311	313	296	294	305	296	264	213	143	62.7	4.38	0.00	---	3291


one-half-peak spread: U:26.8,D:56.8 , L:42.6,NEMA.6 Beam Type: Type 7 x 6 (H x V)

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:1
 Test Date:2023-12-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:6.790m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:3366.3x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:一体透镜二代5头-6500K-18AH	DIM.: 720*250	SERIAL No.:
MFR.: EVERFINE	SUR.:455*170	Shielding Angle:

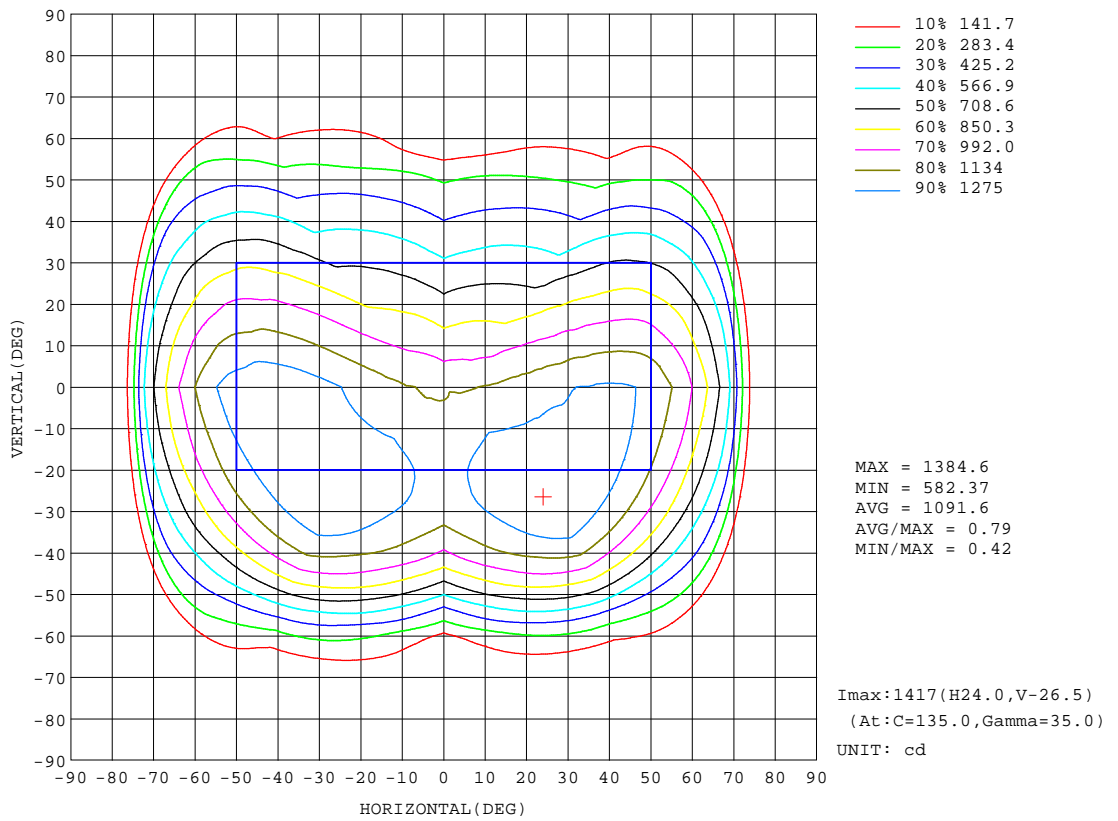


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:1
 Test Date:2023-12-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:6.790m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:3366.3x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:一体透镜二代5头-6500K-18AH	DIM.: 720*250	SERIAL No.:
MFR.: EVERFINE	SUR.:455*170	Shielding Angle:

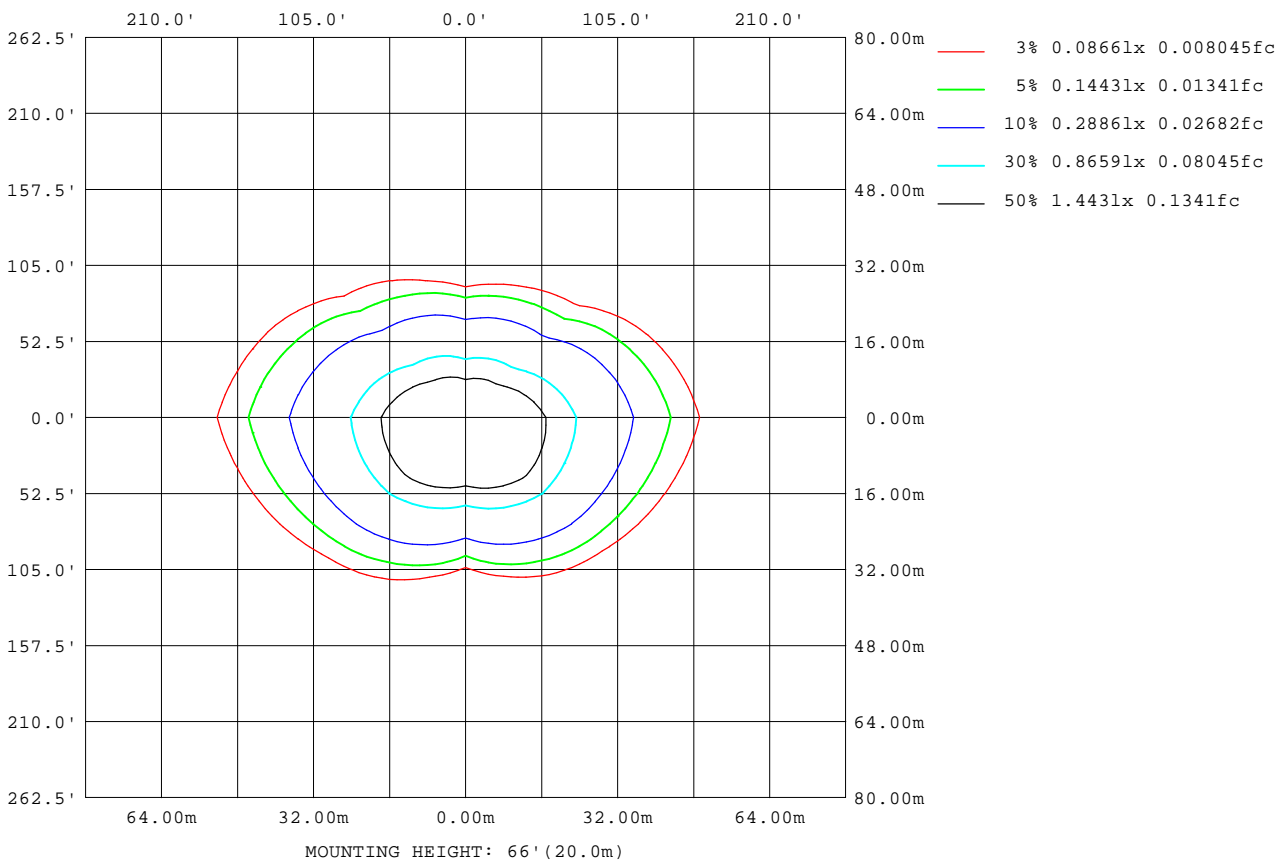

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:1
 Test Date:2023-12-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:6.790m [K=1.0000]
 Remarks:

Planar Illuminance Curve

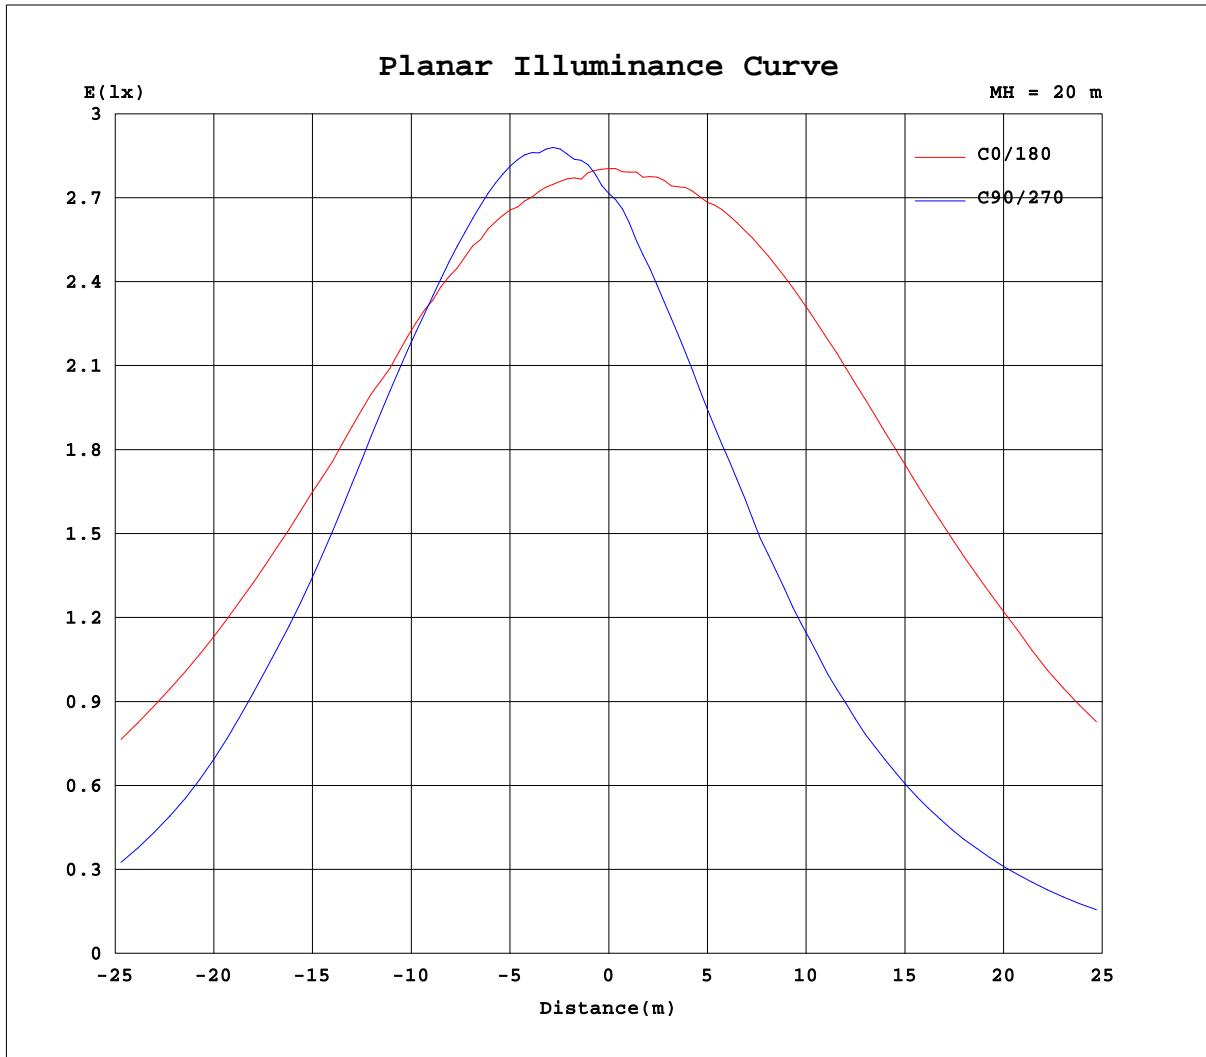


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 1
 Test Date: 2023-12-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 6.790m [K=1.0000]
 Remarks:

AAI Figure

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:3366.3x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:一体透镜二代5头-6500K-18AH	DIM.: 720*250	SERIAL No.:
MFR.: EVERFINE	SUR.:455*170	Shielding Angle:

Flux out:1732 lm

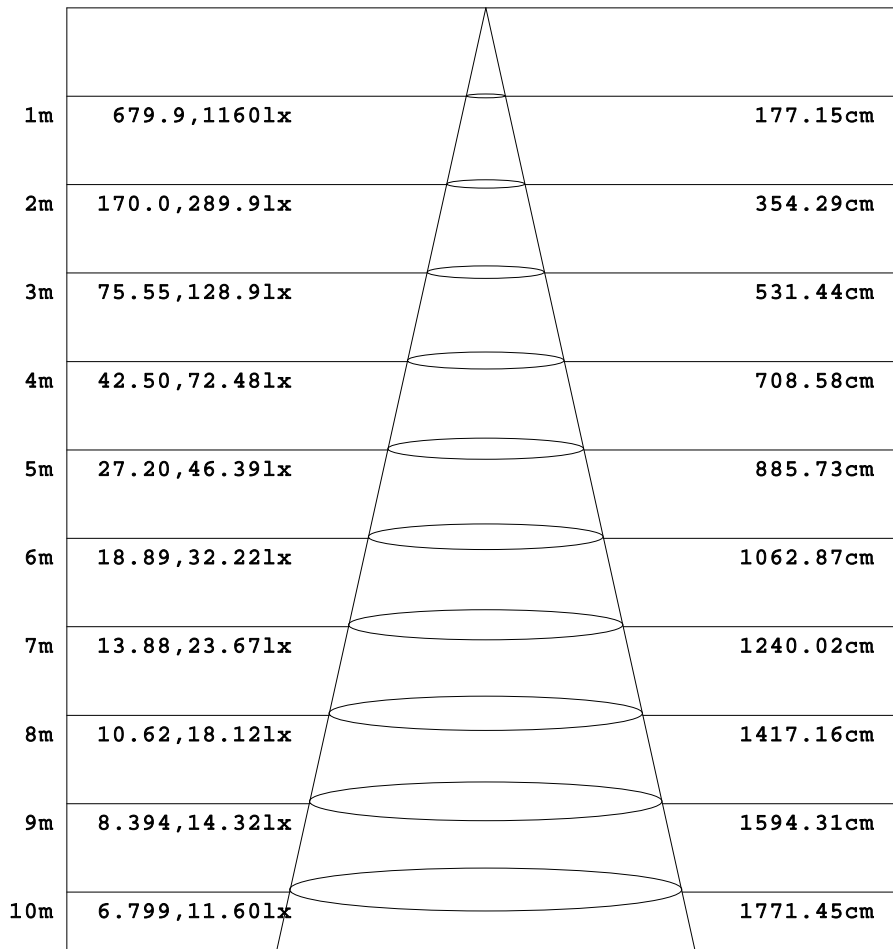

Height Eavg, Emax Angle:83.06deg Diameter

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:1
 Test Date:2023-12-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:6.790m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:3366.3x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 一体透镜二代5头-6500K-18AH	DIM.: 720*250	SERIAL No.:
MFR.: EVERFINE	SUR.:455*170	Shielding Angle:

Table--1

UNIT: cd

H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	2.46	2.82	3.18	3.55	3.91	4.28	4.64	5.01	5.37	5.73	5.41	5.09	4.77	4.45	4.13	3.80	3.48	3.16	2.84
-85	2.46	3.97	5.39	6.49	7.55	8.72	10.0	11.4	12.9	14.4	14.7	15.0	15.1	15.2	15.2	15.2	15.1	14.8	14.5
-80	2.46	5.12	6.86	8.53	10.4	12.5	14.8	17.0	19.0	20.7	20.9	21.3	21.9	22.7	23.5	24.4	25.1	25.8	26.3
-75	2.46	5.88	7.97	10.2	12.8	15.4	17.6	19.8	22.1	23.4	24.8	26.7	28.9	31.3	32.9	33.9	33.9	33.4	32.5
-70	2.46	6.45	8.90	11.7	14.6	18.0	23.6	30.3	35.2	38.7	42.1	50.5	57.9	62.9	65.0	63.1	56.7	46.2	33.6
-65	2.46	6.96	9.71	13.0	17.2	27.1	41.5	72.3	100	100	101	133	155	164	160	143	116	79.6	39.1
-60	2.46	7.32	10.4	14.4	24.5	46.7	107	182	208	222	244	292	320	323	309	276	232	176	110
-55	2.46	7.65	11.1	17.2	39.0	108	234	299	344	392	444	501	531	546	543	517	472	412	338
-50	2.46	7.92	11.8	23.0	62.5	218	352	425	504	580	663	732	770	781	773	748	705	646	570
-45	2.46	8.15	12.4	32.3	126	346	461	563	660	765	863	947	984	994	981	951	910	856	786
-40	2.46	8.35	13.5	44.4	207	444	567	692	814	926	1029	1119	1161	1159	1146	1122	1084	1033	970
-35	2.46	8.51	14.8	59.7	318	531	681	815	944	1061	1159	1234	1293	1290	1265	1230	1192	1148	1097
-30	2.46	8.64	16.8	78.2	415	613	776	924	1053	1166	1247	1311	1359	1370	1333	1297	1263	1228	1190
-25	2.46	8.73	18.7	120	496	686	857	1013	1144	1239	1310	1358	1383	1393	1368	1327	1291	1259	1228
-20	2.46	8.78	21.6	159	552	759	937	1086	1211	1287	1348	1376	1384	1378	1367	1328	1291	1264	1243
-15	2.46	8.80	24.0	193	601	827	1006	1148	1260	1327	1368	1378	1371	1353	1332	1314	1274	1248	1237
-10	2.46	8.78	25.8	220	643	879	1058	1199	1294	1355	1375	1372	1353	1325	1294	1265	1240	1209	1198
-5	2.46	8.73	26.9	239	678	921	1101	1241	1319	1371	1377	1363	1335	1299	1260	1221	1187	1163	1148
0	2.46	8.66	27.4	250	705	956	1135	1272	1338	1383	1377	1356	1322	1278	1233	1187	1148	1122	1122
5	2.46	8.59	26.8	239	676	913	1080	1202	1261	1295	1285	1261	1225	1183	1140	1101	1067	1041	1010
10	2.46	8.49	25.4	220	640	862	1018	1125	1181	1206	1194	1168	1132	1090	1049	1012	978	963	926
15	2.46	8.37	23.5	193	597	806	950	1042	1099	1110	1101	1073	1038	996	953	912	902	880	836
20	2.46	8.23	20.8	159	548	734	871	957	1011	1013	1007	976	940	897	850	835	821	793	751
25	2.46	8.06	17.7	120	493	661	787	873	919	921	907	874	835	791	770	760	742	710	665
30	2.46	7.87	15.4	78.1	413	590	708	783	817	825	799	769	724	694	694	682	661	627	582
35	2.46	7.66	13.1	59.2	317	514	622	685	716	722	698	655	609	615	614	602	580	547	504
40	2.46	7.43	11.4	43.4	206	436	521	584	614	610	591	548	529	535	533	520	498	467	428
45	2.46	7.19	9.97	30.5	125	343	431	483	501	502	475	437	450	455	449	436	417	389	353
50	2.46	6.94	9.04	20.5	62.0	217	341	374	394	386	362	347	351	356	357	348	330	303	270
55	2.46	6.67	8.22	13.7	37.0	107	231	280	281	272	245	259	261	251	235	215	194	167	132
60	2.46	6.37	7.55	10.0	20.9	45.4	106	178	191	167	144	166	175	174	162	140	112	78.6	42.9
65	2.46	6.07	6.97	8.11	11.9	22.9	40.0	71.7	98.1	92.4	78.5	88.7	95.4	98.6	95.6	85.9	70.9	52.1	31.0
70	2.46	5.63	6.41	6.93	7.99	11.1	17.7	26.3	34.1	37.9	38.8	44.7	48.7	49.7	48.7	44.9	38.9	31.2	22.6
75	2.46	5.14	5.83	6.07	6.27	6.75	7.94	10.3	13.5	16.0	18.6	21.0	22.4	22.9	22.6	21.7	20.2	18.0	15.4
80	2.46	4.46	5.13	5.25	5.18	5.05	4.90	4.84	4.95	5.17	6.01	6.82	7.68	8.26	8.64	8.73	8.55	8.14	7.55
85	2.46	3.40	4.07	4.20	4.08	3.84	3.49	3.10	2.68	2.23	2.17	2.11	2.04	1.95	1.84	1.70	1.55	1.38	1.19
90	2.46	2.32	2.19	2.06	1.93	1.80	1.67	1.54	1.41	1.28	1.22	1.16	1.09	1.03	0.97	0.91	0.85	0.79	0.73

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:1
 Test Date:2023-12-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:6.790m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:3366.3x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:一体透镜二代5头-6500K-18AH	DIM.: 720*250	SERIAL No.:
MFR.: EVERFINE	SUR.:455*170	Shielding Angle:

Table--2

UNIT: cd

H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	3.54	4.24	4.93	5.63	6.33	7.03	7.73	8.43	9.12	11.0	12.9	14.8	16.7	18.5	20.4	22.3	24.2	26.1
-85	14.0	13.5	12.8	12.1	11.3	10.5	9.58	8.87	8.39	9.45	10.8	12.4	14.1	16.1	18.3	20.7	23.3	26.1
-80	25.4	24.4	23.3	22.3	21.3	20.2	19.2	17.9	16.5	15.4	14.5	14.0	13.9	14.8	16.7	19.3	22.5	26.1
-75	31.7	30.7	29.5	27.9	26.2	24.2	22.2	20.3	19.1	19.1	18.7	17.9	16.9	16.3	16.0	18.2	21.7	26.1
-70	40.3	45.7	48.7	48.7	45.8	41.2	34.9	27.6	24.4	24.0	21.5	19.6	18.8	18.0	17.3	17.5	21.0	26.1
-65	70.8	98.5	118	128	126	113	89.9	66.7	58.4	46.9	34.7	26.2	20.6	18.9	18.2	17.4	20.4	26.1
-60	170	219	254	276	279	266	233	181	156	128	81.2	45.6	28.1	20.0	18.7	18.4	19.8	26.1
-55	408	464	503	523	518	493	442	371	311	258	192	99.3	45.5	24.6	19.0	18.8	19.4	26.1
-50	646	704	743	763	763	742	694	605	498	406	324	212	82.2	34.7	19.9	19.0	19.1	26.1
-45	859	916	958	987	994	972	921	816	696	567	450	336	160	51.0	22.3	19.1	18.9	26.1
-40	1037	1091	1132	1161	1172	1170	1107	987	865	726	583	450	272	76.7	26.7	19.1	18.7	26.1
-35	1153	1200	1242	1280	1307	1312	1233	1130	999	865	704	548	378	120	33.2	19.1	18.8	26.1
-30	1233	1272	1311	1351	1390	1369	1306	1225	1111	973	818	648	471	181	41.2	19.1	19.1	26.1
-25	1264	1301	1341	1387	1409	1385	1344	1279	1191	1057	914	735	549	254	51.5	19.3	19.3	26.1
-20	1271	1303	1345	1384	1384	1374	1353	1310	1240	1126	986	806	611	328	61.3	19.8	19.6	26.1
-15	1256	1290	1333	1338	1344	1352	1345	1319	1267	1178	1041	868	666	389	71.7	20.3	19.8	26.1
-10	1221	1259	1273	1289	1307	1324	1325	1316	1279	1211	1083	919	715	437	80.0	20.7	19.9	26.1
-5	1180	1193	1218	1241	1270	1291	1302	1305	1283	1231	1114	960	755	474	85.9	20.9	20.1	26.1
0	1121	1141	1171	1201	1236	1260	1279	1293	1282	1243	1136	989	785	498	89.2	21.0	20.2	26.1
5	1010	1039	1069	1099	1134	1162	1183	1199	1195	1165	1070	935	745	473	85.8	20.7	20.0	26.1
10	941	922	968	1002	1032	1066	1089	1105	1107	1082	999	873	697	434	79.8	20.2	19.8	26.1
15	859	865	859	896	927	962	992	1009	1018	994	922	803	642	385	71.4	19.6	19.5	26.1
20	776	788	783	779	823	857	889	912	924	898	840	731	584	324	60.9	18.8	19.3	26.1
25	693	706	707	699	705	749	782	813	826	802	754	656	523	250	50.9	18.0	19.0	26.1
30	611	627	630	626	610	631	675	711	721	706	656	572	448	178	40.3	17.6	18.6	26.1
35	530	548	554	550	534	516	568	602	614	605	557	482	362	118	31.8	17.2	18.3	26.1
40	452	466	473	473	464	447	453	488	506	495	461	402	262	75.8	24.8	17.0	18.2	26.1
45	374	389	397	396	385	366	343	376	394	387	361	307	154	50.1	19.7	17.0	18.4	26.1
50	290	303	307	302	289	273	256	261	279	283	273	198	79.8	32.7	16.6	16.9	18.5	26.1
55	154	168	177	184	188	185	167	147	178	196	171	93.8	44.1	21.2	15.1	16.9	18.8	26.1
60	66.1	86.4	102	110	111	104	92.1	77.0	102	107	74.3	44.0	24.6	15.2	14.7	16.7	19.2	26.1
65	40.9	49.3	55.1	58.0	57.4	53.9	47.7	40.0	44.9	42.4	32.6	21.8	14.7	13.1	14.7	16.0	19.7	26.1
70	25.7	28.2	29.7	30.0	29.1	27.7	25.8	23.5	21.5	19.0	14.7	11.7	11.3	12.7	14.5	16.1	20.3	26.1
75	16.2	16.8	16.9	16.6	15.9	14.7	12.7	10.4	8.45	7.91	8.00	9.02	10.6	12.4	13.8	16.8	21.0	26.1
80	7.40	7.10	6.66	6.08	5.36	4.70	4.04	3.53	3.26	4.80	6.49	8.27	9.83	11.9	14.6	17.9	21.7	26.1
85	1.28	1.36	1.43	1.48	1.52	1.55	1.57	1.63	1.73	3.73	5.85	8.15	10.6	13.3	16.1	19.2	22.5	26.1
90	0.83	0.93	1.03	1.13	1.23	1.33	1.43	1.53	1.63	4.35	7.06	9.78	12.5	15.2	17.9	20.6	23.3	26.1

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:1
 Test Date:2023-12-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:6.790m [K=1.0000]
 Remarks:

Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	1105	1105	1105	1105	1105	1105	1105	1105
3.0	1104	1133	1151	1135	1105	1069	1067	1073
6.0	1109	1158	1182	1161	1112	1040	1012	1035
9.0	1120	1191	1214	1187	1122	1012	958.5	1002
12.0	1132	1224	1241	1226	1147	985.3	905.1	960.1
15.0	1153	1258	1258	1261	1170	957.4	850.4	918.9
18.0	1169	1292	1264	1295	1196	927.5	801.6	895.7
21.0	1186	1321	1264	1327	1223	896.6	742.4	860.0
24.0	1206	1346	1254	1352	1250	865.1	695.7	821.5
27.0	1228	1369	1240	1375	1277	834.0	645.5	777.3
30.0	1241	1388	1210	1393	1302	802.1	592.4	740.7
33.0	1259	1401	1159	1405	1323	767.9	541.1	700.0
36.0	1264	1402	1092	1407	1340	729.9	496.8	659.5
39.0	1273	1388	1015	1393	1353	687.4	450.6	611.4
42.0	1272	1354	923.2	1360	1361	642.0	404.4	560.9
45.0	1263	1294	800.0	1299	1362	596.9	359.0	514.6
48.0	1245	1211	668.6	1223	1332	546.7	310.6	468.4
51.0	1210	1095	532.2	1122	1311	500.1	256.7	414.3
54.0	1140	946.9	387.3	988.3	1270	447.4	169.5	357.9
57.0	1071	786.7	260.3	838.7	1194	385.8	74.30	297.2
60.0	974.2	609.3	112.0	668.1	1118	323.5	43.64	231.3
63.0	864.3	414.8	48.56	492.8	1006	254.5	35.00	158.7
66.0	723.7	251.6	37.82	323.8	900.2	180.5	29.16	99.78
69.0	563.1	125.2	34.65	182.6	751.3	112.4	23.99	60.90
72.0	291.5	53.16	33.77	83.13	583.1	68.90	20.66	35.14
75.0	87.87	25.62	33.05	41.29	246.5	38.50	15.71	23.67
78.0	32.75	19.64	30.37	25.38	60.00	21.99	10.86	12.32
81.0	18.94	18.65	24.72	21.43	17.66	9.886	5.778	4.974
84.0	19.74	13.50	17.66	20.01	9.375	3.691	1.918	2.540
87.0	19.97	7.834	8.653	13.18	7.136	1.962	0.7658	1.614
90.0	25.67	9.032	2.889	5.783	2.419	1.264	0.7435	1.647

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 1
 Test Date: 2023-12-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 6.790m [K=1.0000]
 Remarks: