

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	424.7 cd per klm. -23.0 degrees vertical -21.5 degrees horizontal
---	---

Beam Spread	At 10% of Imax	123.3V x 148.0H
	At 50% of Imax	84.8V x 132.3H
	At 90% of Imax	47.5V x 99.4H

Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	977.9 lumens per klm.
	To 50% of Imax	784.0 lumens per klm.
	To 90% of Imax	238.8 lumens per klm.

Upward LOR	0.0 %
Downward LOR	100.0 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:1
 Test Date:2023-12-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:6.790m [K=1.0000]
 Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:2631.61x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:一体透镜二代4头-6500K-15AH	DIM.: 620*250	SERIAL No.:
MFR.: EVERFINE	SUR.:360*170	Shielding Angle:

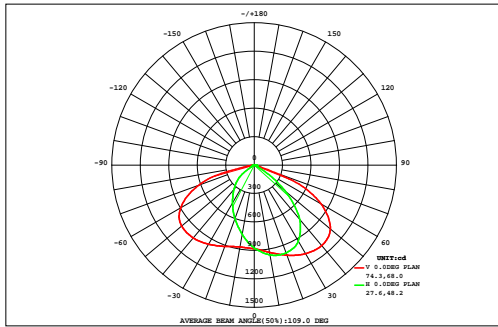

DATA OF LAMP		PHOTOMETRIC DATA	
MODEL	--	Imax(cd)	1118
NOMINAL POWER(W)	--	AVAILABILITY(%)	97.8
RATED VOLTAGE(V)	--	Avai. FLUX(lm)	2573
NOMINAL FLUX(lm)	2631.61	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	2632
TEST VOLTAGE(V)	--	θ @50%(H,V)	132,85DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM															UNIT:lm		Φ t	Φ a	
	0.00	0.01	0.02	0.02	0.03	0.03	0.04	0.04	0.04	0.06	0.07	0.08	0.08	0.07	0.09	0.10	0.08	0.04	0.90	0.00
90	0.00	0.01	0.04	0.07	0.12	0.23	0.33	0.38	0.37	0.41	0.51	0.53	0.46	0.42	0.38	0.20	0.09	0.04	4.60	0.00
80	0.00	0.03	0.09	0.29	0.78	1.27	1.64	1.60	1.10	1.15	1.78	1.95	1.63	1.65	1.85	0.75	0.16	0.04	17.8	1.94
70	0.01	0.05	0.25	1.68	3.38	4.09	4.94	4.98	4.20	4.11	4.80	4.86	4.30	4.30	4.16	2.34	0.37	0.04	52.8	47.2
60	0.01	0.07	1.00	4.93	7.38	8.23	9.48	9.91	9.13	8.86	9.20	8.62	7.69	7.80	6.63	4.15	0.84	0.05	104	103
50	0.01	0.12	2.72	8.08	11.5	12.6	13.2	13.8	13.0	12.5	12.6	11.6	11.3	11.2	9.19	5.73	1.51	0.06	151	150
40	0.01	0.20	4.59	10.9	15.2	17.1	17.4	17.8	17.1	16.5	16.0	15.2	15.3	14.3	11.6	7.17	2.15	0.07	199	198
30	0.01	0.33	6.17	13.4	18.7	21.4	22.2	21.9	21.3	20.4	19.6	19.6	19.1	17.3	13.8	8.47	2.67	0.08	246	246
20	0.01	0.44	7.33	15.6	21.9	25.4	26.6	26.4	25.5	24.4	24.0	23.8	22.7	20.2	15.8	9.57	3.04	0.09	293	292
10	0.01	0.44	7.36	16.0	23.0	27.4	29.3	29.4	28.5	27.8	27.3	26.5	24.9	21.6	16.5	9.72	3.05	0.09	319	318
0	0.01	0.33	6.23	14.4	21.8	27.2	30.3	31.3	30.4	29.7	29.4	28.0	25.5	21.4	15.6	8.86	2.69	0.08	323	323
-10	0.01	0.20	4.63	12.0	19.5	25.8	30.2	31.2	30.2	29.7	29.8	29.0	25.5	20.4	14.1	7.67	2.17	0.07	312	312
-20	0.01	0.13	2.71	8.85	15.4	21.9	26.6	27.9	26.9	26.7	27.6	27.1	23.8	18.0	11.7	6.16	1.52	0.06	273	273
-30	0.01	0.09	0.98	5.14	9.62	14.7	18.7	20.3	19.4	19.7	21.5	21.4	18.9	13.6	8.52	4.40	0.85	0.05	198	197
-40	0.01	0.08	0.28	1.61	3.72	6.08	8.66	9.66	8.79	9.55	11.9	12.4	10.8	7.70	5.01	2.41	0.38	0.04	99.2	96.9
-50	0.01	0.06	0.17	0.36	0.71	1.21	1.85	2.02	1.54	2.23	3.93	4.42	3.57	2.50	1.98	0.77	0.19	0.04	27.6	14.6
-60	0.00	0.03	0.10	0.23	0.37	0.49	0.59	0.68	0.72	0.83	0.94	0.86	0.65	0.50	0.45	0.26	0.12	0.04	7.86	0.00
-70	0.01	0.02	0.04	0.08	0.13	0.19	0.24	0.28	0.30	0.32	0.32	0.31	0.29	0.26	0.21	0.16	0.10	0.04	3.29	0.00
-80	0.01	0.02	0.04	0.08	0.13	0.19	0.24	0.28	0.30	0.32	0.32	0.31	0.29	0.26	0.21	0.16	0.10	0.04	3.29	0.00
-90	0.01	0.02	0.04	0.08	0.13	0.19	0.24	0.28	0.30	0.32	0.32	0.31	0.29	0.26	0.21	0.16	0.10	0.04	3.29	0.00
Φ t	0.16	2.63	44.7	114	173	215	242	250	239	235	241	236	216	183	138	78.9	22.0	1.01	2632	---
Φ a	0.00	0.65	42.2	111	170	211	238	245	234	230	236	232	213	180	135	76.6	19.2	0.00	---	2573


one-half-peak spread: U:27.8,D:57.5 , L:41.4, NEMA Beam Type: Type 7 x 6 (H x V)

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:1
 Test Date:2023-12-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:6.790m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:2631.61x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:一体透镜二代4头-6500K-15AH	DIM.: 620*250	SERIAL No.:
MFR.: EVERFINE	SUR.:360*170	Shielding Angle:

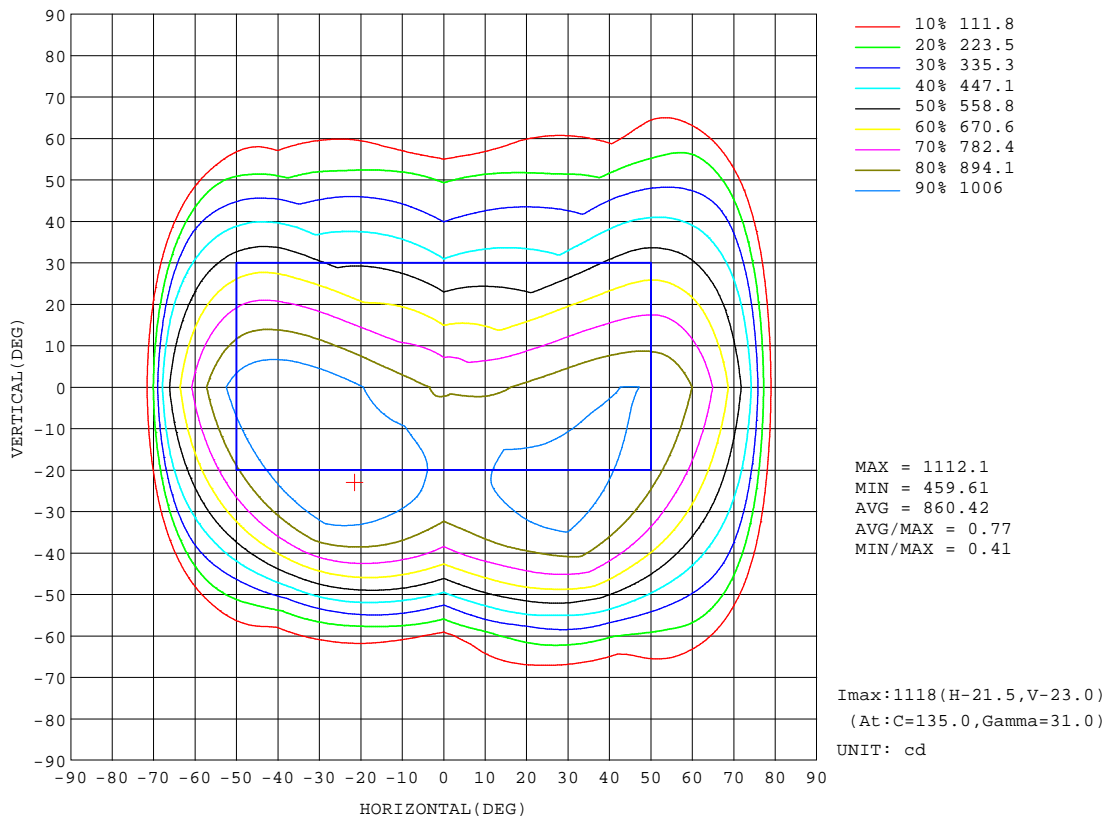


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:1
Test Date:2023-12-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:6.790m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:2631.61x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:一体透镜二代4头-6500K-15AH	DIM.: 620*250	SERIAL No.:
MFR.: EVERFINE	SUR.:360*170	Shielding Angle:

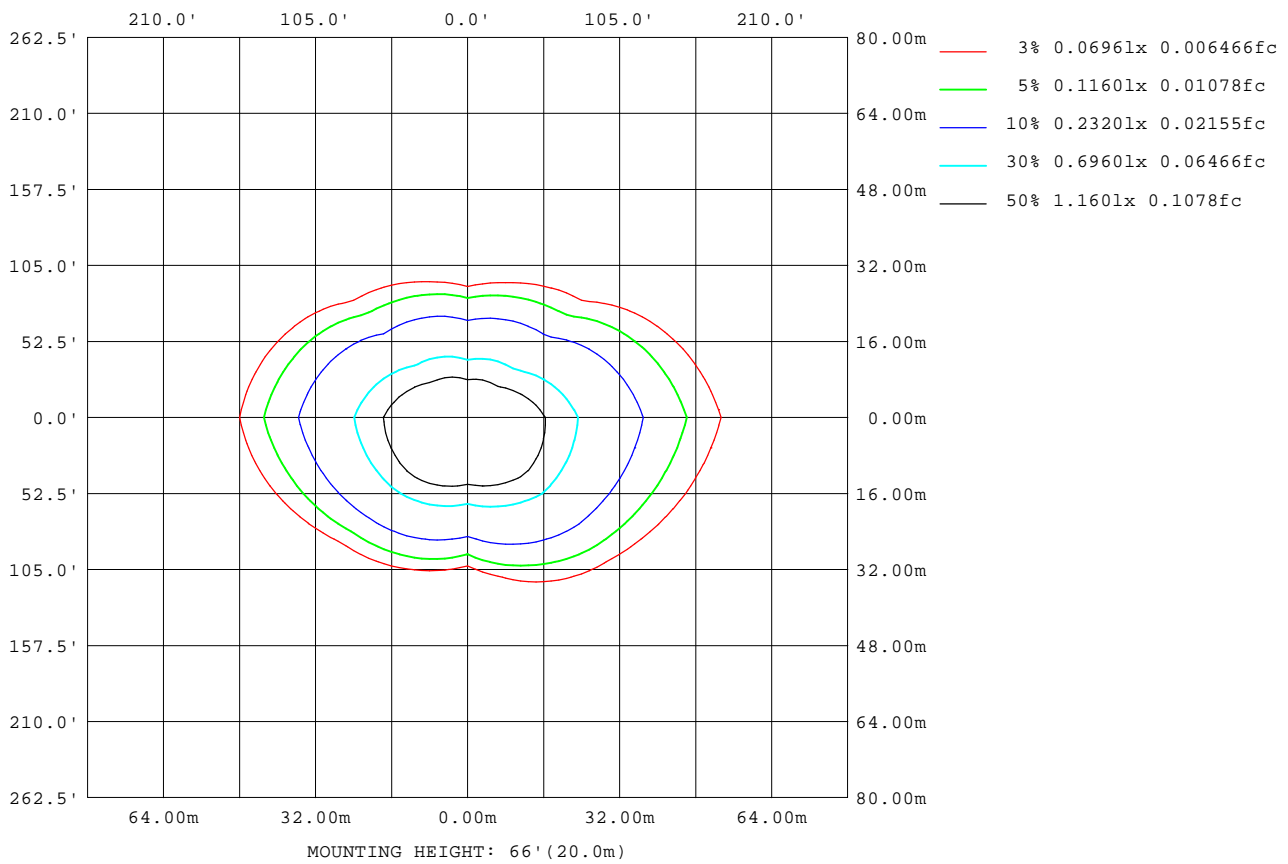

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:1
 Test Date:2023-12-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:6.790m [K=1.0000]
 Remarks:

Planar Illuminance Curve

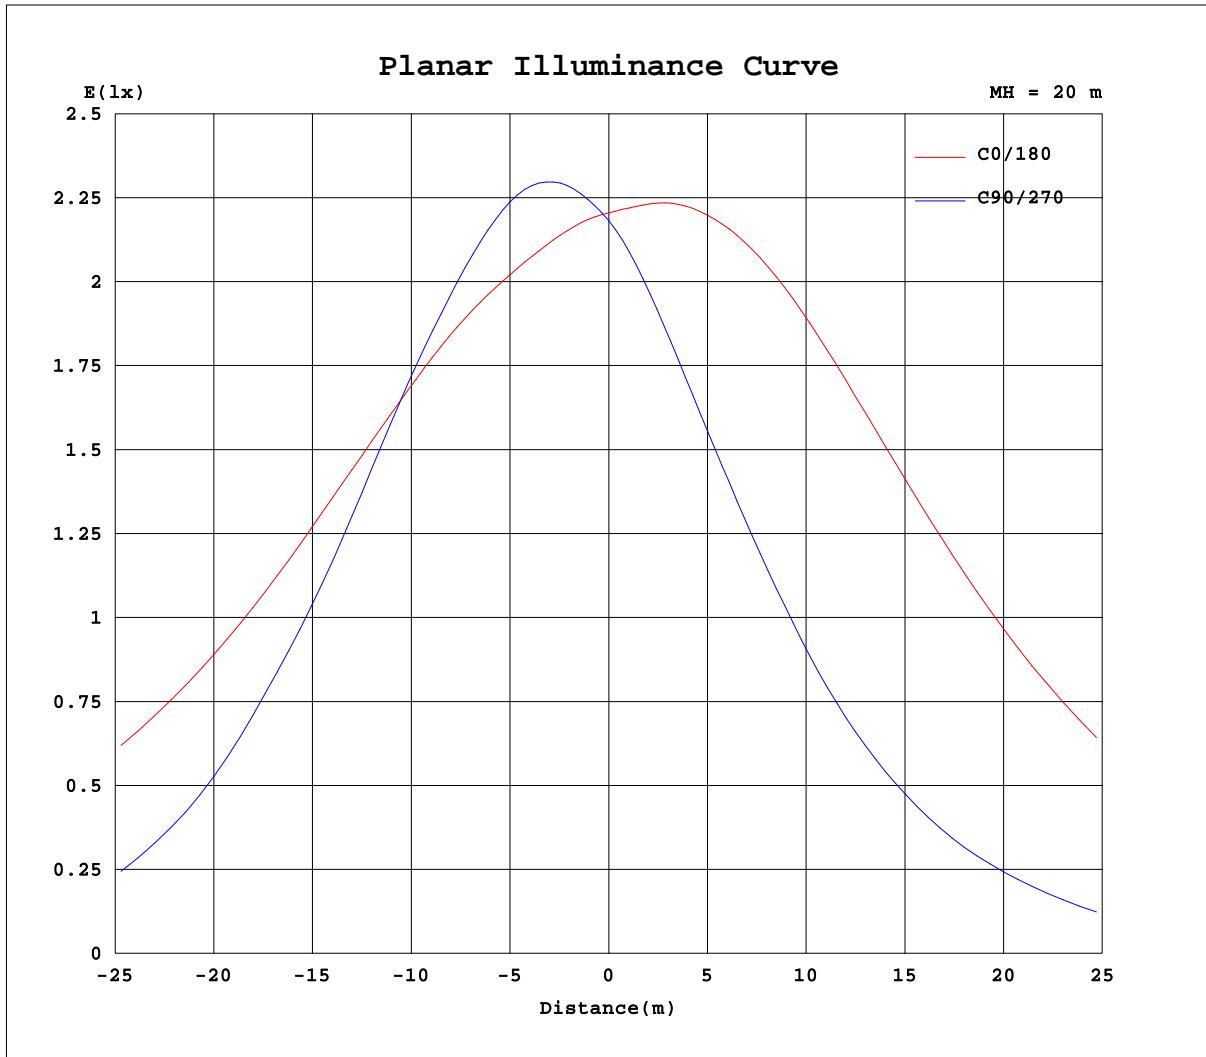


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 1
 Test Date: 2023-12-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 6.790m [K=1.0000]
 Remarks:

AAI Figure

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:2631.61x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:一体透镜二代4头-6500K-15AH	DIM.: 620*250	SERIAL No.:
MFR.: EVERFINE	SUR.:360*170	Shielding Angle:

Flux out:1416 lm

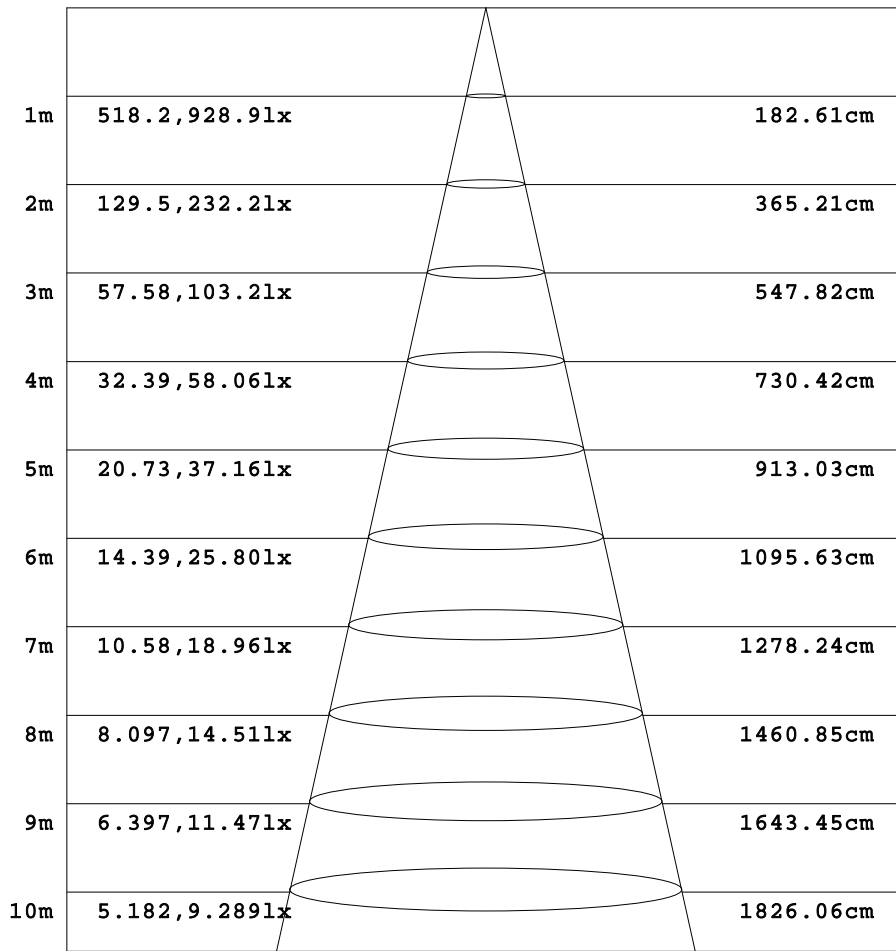

Height Eavg, Emax Angle:84.79deg Diameter

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:1
 Test Date:2023-12-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:6.790m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:2631.61x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 一体透镜二代4头-6500K-15AH	DIM.: 620*250	SERIAL No.:
MFR.: EVERFINE	SUR.:360*170	Shielding Angle:

Table--1

UNIT: cd

H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	1.52	1.94	2.37	2.79	3.22	3.65	4.07	4.50	4.93	5.35	5.00	4.65	4.29	3.94	3.59	3.24	2.89	2.53	2.18
-85	1.52	1.89	2.22	2.53	2.81	3.08	3.37	3.64	4.03	4.51	5.01	5.68	6.54	7.33	8.05	8.70	9.27	9.77	10.2
-80	1.52	1.83	2.09	2.37	2.78	3.69	5.54	7.70	9.87	12.2	13.8	15.1	16.1	16.9	17.6	18.1	18.5	18.8	19.0
-75	1.52	1.78	2.03	2.54	4.97	8.00	10.8	13.5	16.0	18.1	18.9	19.6	20.5	21.4	22.3	23.0	23.6	24.2	24.7
-70	1.52	1.73	2.10	4.56	8.20	11.3	14.0	16.2	17.9	19.8	21.1	22.7	24.7	26.8	28.5	29.3	29.0	27.8	26.2
-65	1.52	1.69	2.57	6.94	10.3	13.2	15.5	18.8	23.3	27.4	32.1	40.9	49.9	57.3	61.9	61.4	54.7	43.7	30.4
-60	1.52	1.68	3.94	8.40	11.6	14.4	20.0	30.2	52.4	72.1	75.6	107	132	148	153	150	136	112	80.7
-55	1.52	1.68	5.45	9.41	12.6	17.8	33.3	80.4	141	169	187	237	279	311	331	333	320	293	255
-50	1.52	1.70	6.49	10.1	13.8	27.6	80.5	188	251	298	350	411	469	503	519	520	505	474	430
-45	1.52	1.73	7.17	10.7	17.1	47.6	179	300	370	445	521	591	649	686	703	699	679	645	597
-40	1.52	1.75	7.60	11.2	24.3	104	296	400	497	590	676	754	817	849	856	849	828	794	747
-35	1.52	1.92	7.91	11.9	35.2	186	390	505	615	717	807	888	954	973	972	956	929	894	849
-30	1.52	2.31	8.09	12.8	50.7	290	471	602	721	823	912	983	1035	1063	1050	1027	999	966	928
-25	1.52	2.64	8.21	14.8	73.3	378	548	689	809	909	988	1043	1082	1107	1098	1066	1035	1003	970
-20	1.52	2.90	8.26	16.8	119	447	619	763	881	974	1037	1078	1102	1112	1111	1080	1043	1012	985
-15	1.52	3.11	8.25	19.6	160	502	681	826	939	1020	1069	1096	1105	1100	1089	1075	1035	1003	983
-10	1.52	3.24	8.19	21.7	193	547	733	877	985	1052	1088	1101	1098	1082	1060	1036	1014	977	961
-5	1.52	3.31	8.06	23.1	216	584	776	918	1020	1076	1099	1101	1088	1063	1032	998	967	938	921
0	1.52	3.31	7.89	23.6	230	613	811	951	1048	1093	1107	1100	1079	1048	1010	971	934	902	882
5	1.52	3.26	7.78	23.0	217	583	768	898	985	1023	1031	1020	997	967	932	897	867	841	813
10	1.52	3.14	7.63	21.4	193	545	719	839	917	950	954	941	917	887	855	822	793	777	741
15	1.52	2.96	7.43	19.1	161	500	663	774	845	874	875	860	836	805	773	739	728	707	669
20	1.52	2.72	7.19	16.0	121	446	600	704	768	796	794	777	752	719	683	673	662	638	599
25	1.52	2.42	6.90	13.6	74.7	379	531	630	688	715	711	690	662	628	613	607	592	567	530
30	1.52	2.07	6.61	11.2	51.8	293	459	550	604	627	624	601	567	545	548	540	523	496	460
35	1.52	1.67	6.30	9.70	35.5	190	384	467	517	537	534	509	472	479	480	473	456	430	395
40	1.52	1.49	5.93	8.38	23.6	107	298	379	425	443	439	415	407	415	414	404	388	364	333
45	1.52	1.46	5.53	7.31	14.9	49.6	185	292	330	346	342	321	338	348	347	340	325	303	276
50	1.52	1.42	4.98	6.49	10.3	27.4	85.1	193	238	249	242	243	255	266	271	267	256	238	214
55	1.52	1.39	4.15	5.81	7.69	14.7	34.8	86.7	147	158	147	165	174	176	172	162	151	135	111
60	1.52	1.37	2.89	5.16	6.07	8.88	16.9	32.0	59.3	81.6	78.7	93.0	105	109	105	94.3	78.0	57.7	34.9
65	1.52	1.35	1.76	4.36	5.10	5.94	8.56	14.0	22.9	32.1	40.2	48.1	53.6	56.1	55.7	51.7	44.9	35.3	24.1
70	1.52	1.36	1.40	2.78	4.17	4.55	4.99	6.39	9.34	13.2	17.7	21.5	24.5	26.4	27.3	26.4	24.1	20.8	16.9
75	1.52	1.39	1.34	1.40	2.52	3.42	3.56	3.60	3.75	4.28	5.86	7.72	9.36	10.7	11.5	12.0	12.0	11.7	11.1
80	1.52	1.41	1.33	1.30	1.32	1.50	1.95	2.20	2.11	1.88	2.09	2.41	2.83	3.30	3.79	4.23	4.63	4.95	5.20
85	1.52	1.44	1.37	1.31	1.26	1.22	1.20	1.18	1.15	1.12	1.06	1.00	0.96	0.91	0.86	0.80	0.73	0.66	0.59
90	1.52	1.46	1.41	1.36	1.31	1.25	1.20	1.15	1.10	1.04	0.98	0.92	0.85	0.79	0.73	0.66	0.60	0.54	0.47

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:1
 Test Date:2023-12-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:6.790m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:0V I:0A P:0W PF:0.0000 Freq:0Hz Lamp Flux:2631.61x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:一体透镜二代4头-6500K-15AH	DIM.: 620*250	SERIAL No.:
MFR.: EVERFINE	SUR.:360*170	Shielding Angle:

Table--2

UNIT: cd

H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	2.61	3.04	3.47	3.91	4.34	4.77	5.20	5.63	6.06	7.13	8.20	9.27	10.3	11.4	12.5	13.6	14.6	15.7
-85	10.7	11.2	11.6	11.9	12.2	12.5	12.8	13.0	13.0	12.7	12.4	12.2	12.2	12.5	13.1	13.9	14.7	15.7
-80	18.7	18.2	17.7	17.1	16.4	15.9	15.4	15.2	15.3	16.4	16.5	15.9	14.9	14.1	13.8	14.1	14.9	15.7
-75	26.6	28.1	28.9	28.6	27.5	25.3	22.5	19.7	19.1	23.0	23.6	21.5	19.0	16.6	14.8	14.3	14.9	15.7
-70	40.4	53.0	62.2	66.6	64.8	59.8	52.2	42.8	44.5	53.8	47.2	37.2	29.4	21.7	16.9	14.7	14.9	15.7
-65	68.2	102	130	148	156	152	136	112	106	119	115	83.2	50.7	32.9	20.9	15.4	14.8	15.7
-60	140	192	234	265	285	288	271	236	216	206	196	169	103	51.0	27.9	16.9	14.8	15.7
-55	318	371	412	440	450	450	437	398	354	317	284	253	190	87.5	39.8	19.4	14.8	15.7
-50	493	545	585	613	628	630	610	562	503	439	383	331	273	151	54.6	22.7	14.9	15.7
-45	654	699	736	765	784	788	772	709	634	563	485	414	345	231	76.2	26.8	15.1	15.7
-40	794	832	861	884	902	914	890	824	751	669	584	497	410	302	109	32.5	15.2	15.7
-35	887	918	946	971	992	1005	962	910	841	761	672	574	474	366	152	39.0	15.4	15.7
-30	952	972	995	1022	1050	1040	1006	964	908	835	745	646	537	418	201	47.1	15.9	15.7
-25	984	998	1016	1043	1061	1050	1028	995	953	891	807	709	593	464	251	54.4	16.3	15.7
-20	990	1000	1018	1038	1041	1042	1033	1012	980	932	858	761	642	505	295	60.9	16.7	15.7
-15	981	989	1005	1008	1014	1024	1027	1017	996	959	897	805	685	542	330	66.4	17.0	15.7
-10	955	965	967	975	987	1003	1015	1015	1003	977	927	840	723	574	359	70.7	17.2	15.7
-5	921	918	926	942	961	982	1001	1009	1006	990	950	870	754	601	381	73.9	17.3	15.7
0	876	876	889	912	937	963	987	1002	1007	999	968	893	780	623	396	75.8	17.4	15.7
5	796	804	816	837	862	888	913	931	941	938	914	848	744	598	381	73.9	17.2	15.7
10	740	721	739	762	787	814	840	860	874	876	857	798	703	568	358	70.7	17.0	15.7
15	676	667	656	683	711	739	766	789	806	813	797	745	658	534	329	66.2	16.7	15.7
20	611	611	602	599	631	662	691	717	738	749	735	689	609	496	294	60.7	16.3	15.7
25	546	550	547	539	546	580	613	644	669	682	669	629	558	455	250	54.1	15.8	15.7
30	478	488	490	485	473	496	535	570	598	612	601	566	503	411	200	46.6	15.3	15.7
35	414	426	431	429	421	412	456	495	525	538	530	500	446	360	152	38.3	14.7	15.7
40	352	365	371	373	370	361	375	417	447	460	458	433	388	298	109	31.5	14.4	15.7
45	294	307	315	318	316	307	296	336	365	382	382	366	331	228	75.9	25.5	14.2	15.7
50	231	244	251	252	248	242	237	251	283	303	309	301	266	150	54.0	21.1	14.1	15.7
55	132	146	156	166	174	176	172	167	201	226	240	239	187	87.1	38.5	17.4	14.0	15.7
60	57.9	79.0	96.8	110	117	119	112	98.5	128	160	179	163	102	50.1	25.8	14.7	14.0	15.7
65	37.9	50.2	59.9	66.2	68.3	66.7	62.1	55.4	74.5	105	110	82.0	49.9	30.8	18.0	13.2	14.0	15.7
70	22.8	28.0	32.2	34.7	35.2	34.4	32.5	29.4	37.5	50.9	46.3	35.8	26.6	18.1	13.4	12.5	14.1	15.7
75	13.1	14.9	16.3	17.2	17.8	17.9	17.8	17.2	17.7	20.7	20.0	16.8	13.8	11.7	11.2	12.4	14.2	15.7
80	6.20	7.08	7.79	8.29	8.57	8.53	8.18	7.76	7.35	8.13	8.33	8.36	8.70	9.53	10.8	12.5	14.2	15.7
85	0.93	1.26	1.56	1.83	2.04	2.19	2.28	2.33	2.38	3.60	4.88	6.28	7.73	9.29	10.9	12.6	14.1	15.7
90	0.52	0.57	0.62	0.67	0.72	0.76	0.81	0.86	0.91	2.55	4.19	5.84	7.48	9.12	10.8	12.4	14.1	15.7

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:1
 Test Date:2023-12-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:6.790m [K=1.0000]
 Remarks:

Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	876.1	876.1	876.1	876.1	876.1	876.1	876.1	876.1
3.0	871.6	892.8	905.0	904.1	885.4	859.4	841.9	846.9
6.0	869.1	909.7	933.4	935.3	901.4	841.8	801.5	815.1
9.0	869.1	927.0	957.3	969.6	921.0	823.1	757.7	782.5
12.0	873.8	945.5	976.1	1002	941.6	802.0	713.6	749.1
15.0	882.6	966.0	986.3	1033	963.7	779.0	671.2	716.6
18.0	895.6	984.8	989.2	1062	987.5	754.3	629.0	686.1
21.0	910.6	1001	986.2	1086	1011	729.4	587.5	657.5
24.0	925.6	1017	977.1	1106	1033	702.0	546.0	628.7
27.0	940.8	1031	962.2	1120	1054	673.2	502.8	599.5
30.0	956.2	1044	931.8	1128	1071	643.6	461.3	570.4
33.0	970.7	1056	887.4	1126	1084	612.5	422.0	540.2
36.0	983.8	1061	833.8	1110	1095	578.7	384.2	508.7
39.0	992.5	1053	773.3	1077	1099	541.2	347.2	475.7
42.0	997.9	1032	695.6	1027	1097	502.3	310.3	443.1
45.0	1000.0	996.7	598.8	958.6	1086	464.2	276.8	411.9
48.0	997.4	948.0	499.9	865.3	1064	422.7	240.8	378.7
51.0	987.8	882.3	395.4	750.7	1025	379.8	200.0	344.9
54.0	970.3	790.8	287.2	625.2	967.4	331.0	138.8	308.5
57.0	936.1	684.3	190.0	490.4	893.5	276.5	64.14	268.0
60.0	886.9	559.0	81.01	347.9	804.8	216.4	35.01	221.2
63.0	826.0	432.4	36.59	217.8	691.2	157.4	27.52	173.0
66.0	746.2	298.3	29.16	115.6	563.4	100.1	22.30	124.5
69.0	654.7	180.8	26.74	52.19	337.0	61.76	17.87	79.91
72.0	547.2	90.17	25.62	27.57	79.47	33.81	14.97	49.43
75.0	393.1	41.68	24.77	20.86	23.42	17.23	11.12	30.07
78.0	164.0	21.16	22.37	18.99	9.659	6.985	7.478	19.91
81.0	57.03	15.51	17.41	16.61	7.253	2.706	3.934	12.10
84.0	21.27	15.28	12.12	9.400	5.286	1.484	1.085	5.188
87.0	15.02	11.87	6.301	4.304	1.411	1.107	0.5017	1.991
90.0	15.58	6.024	2.189	5.404	1.505	1.037	0.4757	0.9171

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 1
 Test Date: 2023-12-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 6.790m [K=1.0000]
 Remarks: