



Lightsource Test Report

Product Infomation

Product Number: 343

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.3066$ $y=0.3272$ $u(u')=0.1943$ $v=0.3110$ $v'=0.4664$

CCT: $T_c=6862K$ ($duv=0.00539$)

Color Ratio: $R=0.130$ $G=0.823$ $B=0.047$

Peak Wavelength: 444.2nm

Half Bandwidth: 19.1nm

Dominant Wavelength: 488.7nm

Color Purity: 0.095

Central Wave: 444.8nm

Gravity Wave: 444.6nm

CRI: $R_a = 79.6$

TM30: $R_f = 81$, $R_g = 97$

GAI: $GAI_BB_8=91.0$, $GAI_BB_15=94.4$, $GAI_EES=88.6$

$R1 = 78$

$R2 = 81$

$R3 = 85$

$R4 = 81$

$R5 = 80$

$R6 = 77$

$R7 = 85$

$R8 = 70$

$R9 = 0$

$R10 = 57$

$R11 = 82$

$R12 = 61$

$R13 = 78$

$R14 = 92$

$R15 = 72$

Color Quality Scale: $Q_a = 81.4$, $Q_f = 80.9$, $Q_p = 83.2$, $Q_g = 93.2$

$Q1 = 85$

$Q2 = 95$

$Q3 = 77$

$Q4 = 77$

$Q5 = 83$

$Q6 = 83$

$Q7 = 85$

$Q8 = 91$

$Q9 = 94$

$Q10 = 82$


$Q11 = 81$

$Q12 = 81$

$Q13 = 82$

$Q14 = 69$

$Q15 = 76$

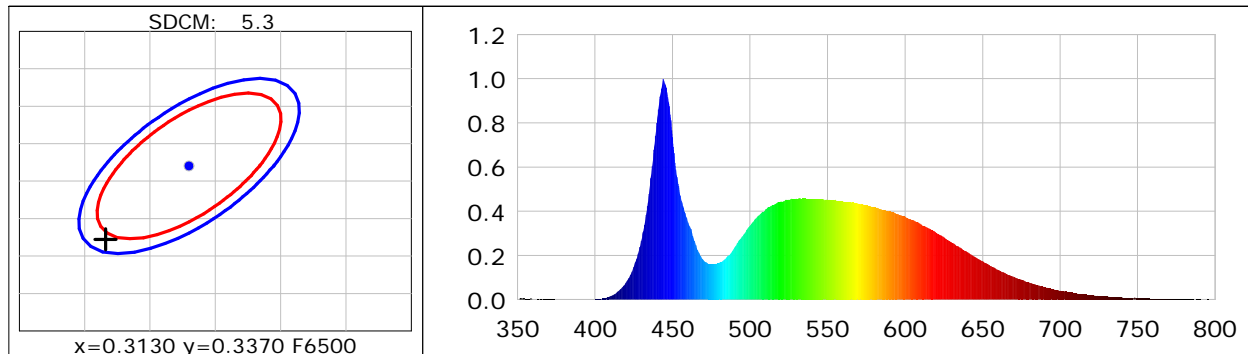

Photometric Parameters

Luminous Flux: 24886 lm

Efficiency: 124.91 lm/W

Radiant Power: 89.684 W

Total mains efficacy: 124.91 lm/W Energy Efficiency Class: D (EU 2019/2015)

Auxiliary lamp correction factor: 1.00

Electric Parameters

Voltage: 219.43V

Current: 0.9151A

Power: 199.23W

Power Factor: 0.9922

Frequency: 49.99Hz

DF: 0.9942

Test Infomation

Scan Range: 350~800:1nm

Photometric Method: sphere-spectroradiometer

Stabilization Time: 0 Min ALC.: 1.0000

Photometric Condition: Sphere diameter: 2.00m, 4T

Max of Signal: 44791 (3178)

CCD Integration Time: 28.40 ms

Condition: Tx:29.2°C, Ti:27.4°C, R.H.:60%

Test Device: CMS-3500S

Test Lab:

Test Time: 2025-08-15 11:46:22

Operator:

Inspector: